


直流無刷變頻風扇






240EC

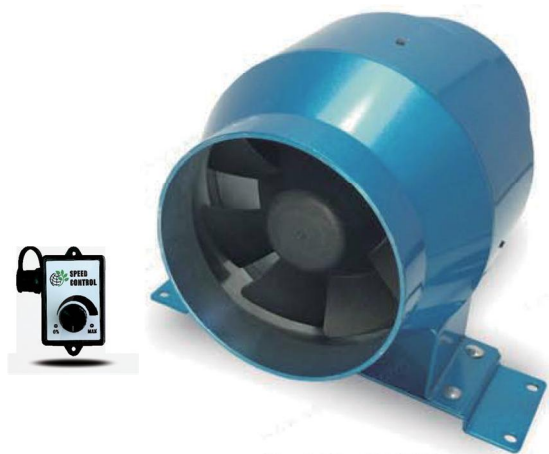


260EC / 280EC

型號	管徑	電壓	頻率	馬力	電流	轉速	最大靜壓		最大風量			噪音	重量	溫度
Model	Pipe Size	Voltage	Frequency	Power	Current	Speed	Max. Pressure		Max. Air Flow			Noise	Weight	Temp
	Inch	V	Hz	W	A	R.P.M.	mmAq	Pa	CMM	CFM	CMH	dB(A)	Kg	°C
YS - 240EC	4 / 100 mm	110 / 240	50	20	0.24	5000	28	274	4.58	160	275	0 / 60	1	-10 / 60
YS - 260EC	6 / 150 mm		/	32	0.3	4200	32	314	8.5	300	510		1.4	
YS - 280EC	8 / 200 mm		60	50	0.4	3000	28	274	17	600	1020		1.4	

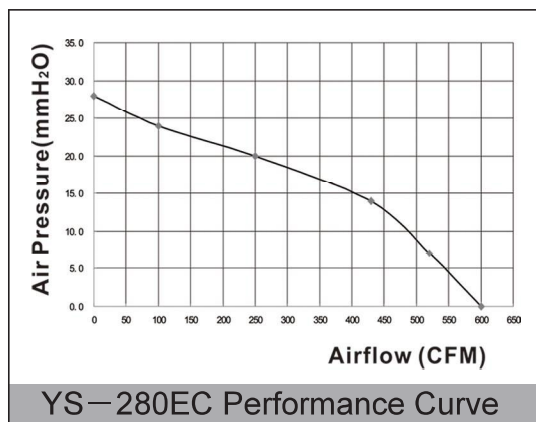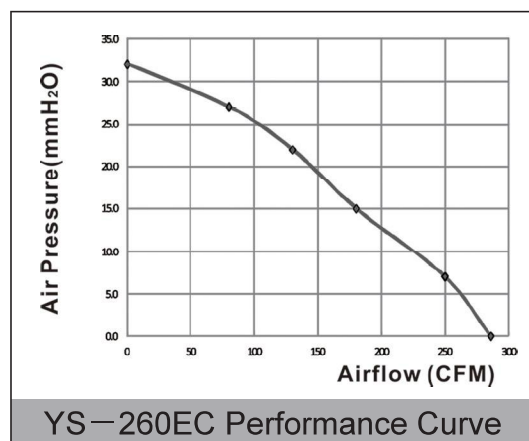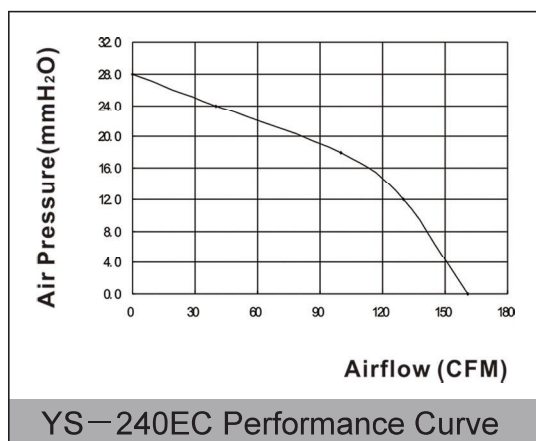


體積小，風量大，靜壓高，重量輕
全機採用高效率直流變頻馬達
省電，節能，低噪音，高效率
全電壓輸入，電壓範圍 90 V ~ 240 V
0% ~ 100 % 的無段調速
一體成形金屬烤漆外殼
風葉係高強度PBT 材質製作


商品尺寸

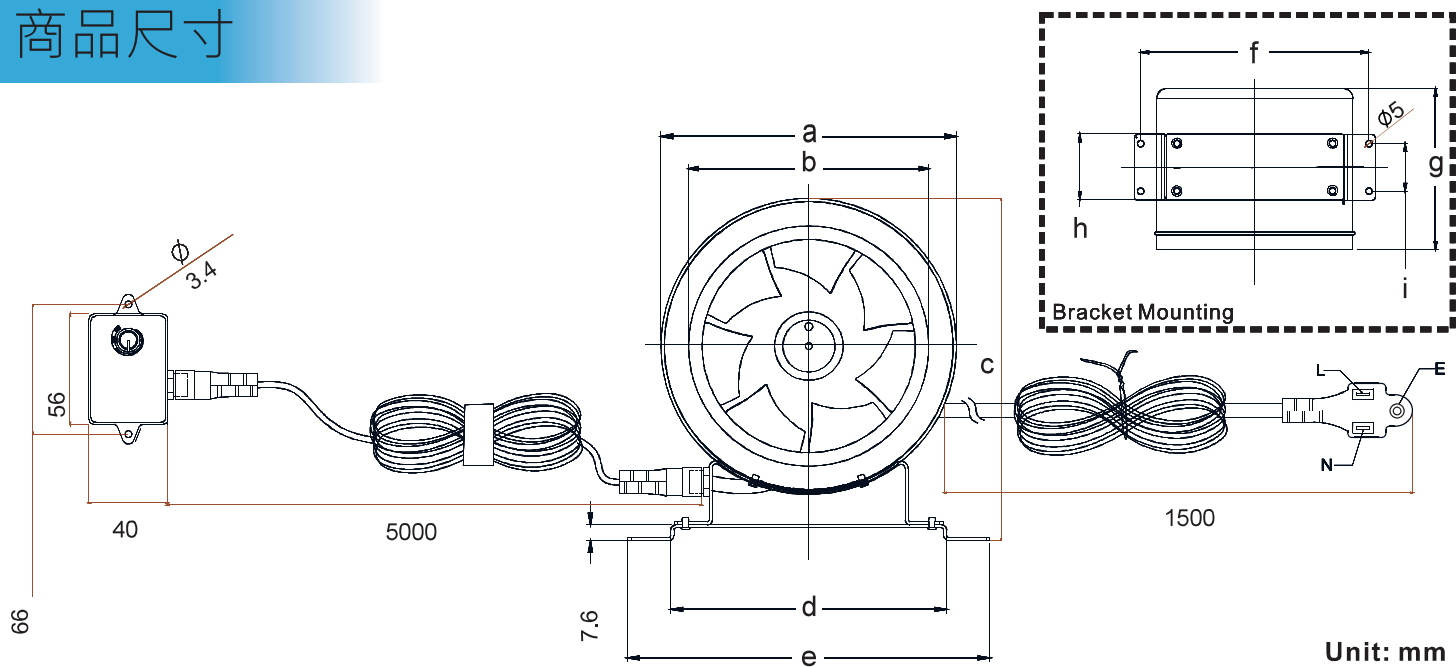


型號	a	b	c	d	e	f	g	h	i
YS - 240EC		98		116.8	153.4	174.6	125	50.8	36.7
YS - 260EC	150		173.8	140	184	174.6	125	50.8	36.7
YS - 280EC	200		173.8	177	222.5	209.5	160	60.5	36.8

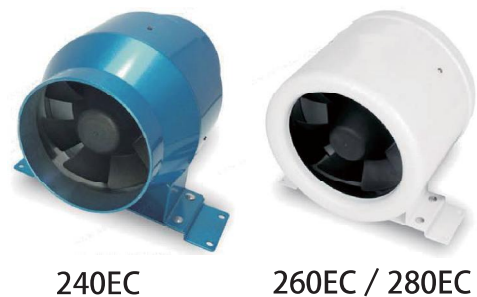


可用範圍

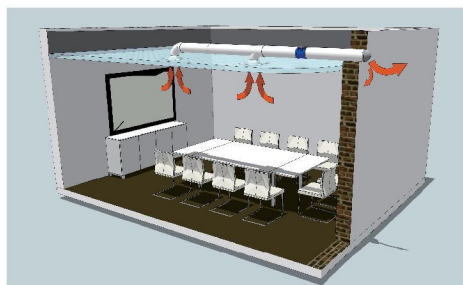

會議室

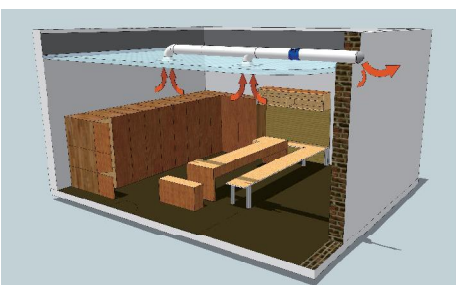


更衣室

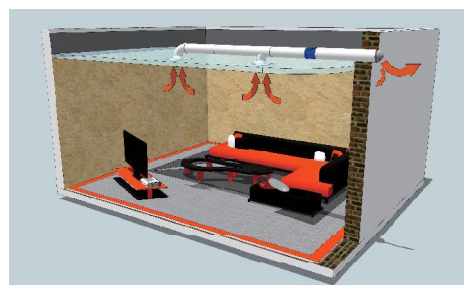

客廳



健身房



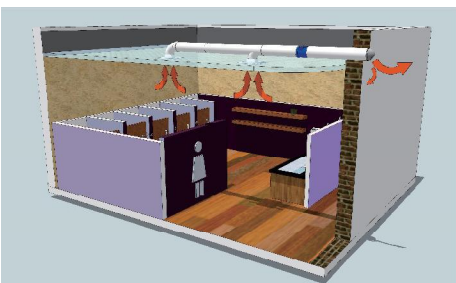


化妝室






臥房

UF-240

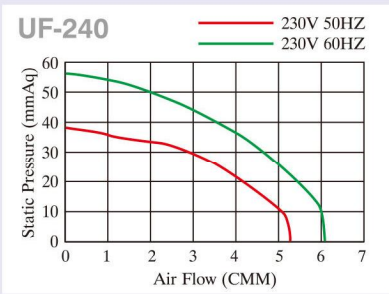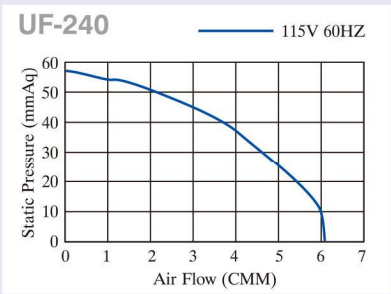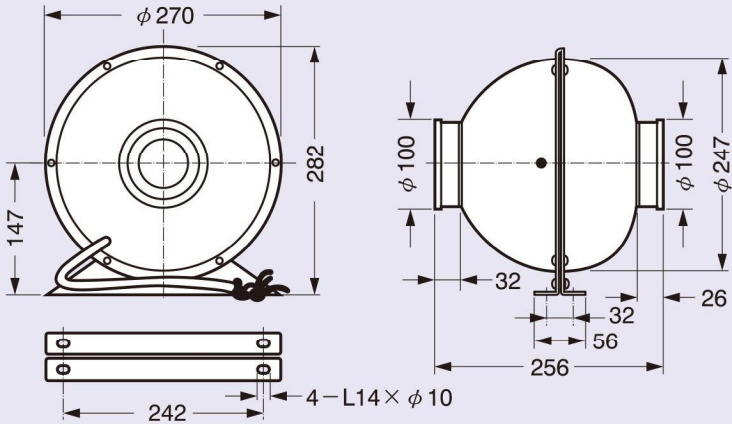


UF-250

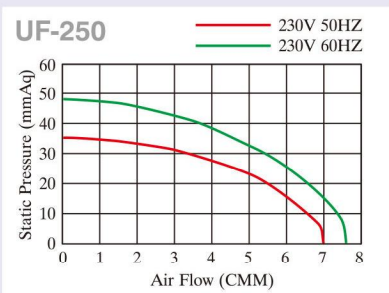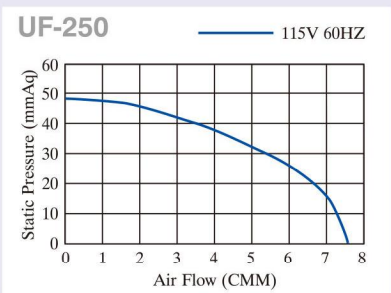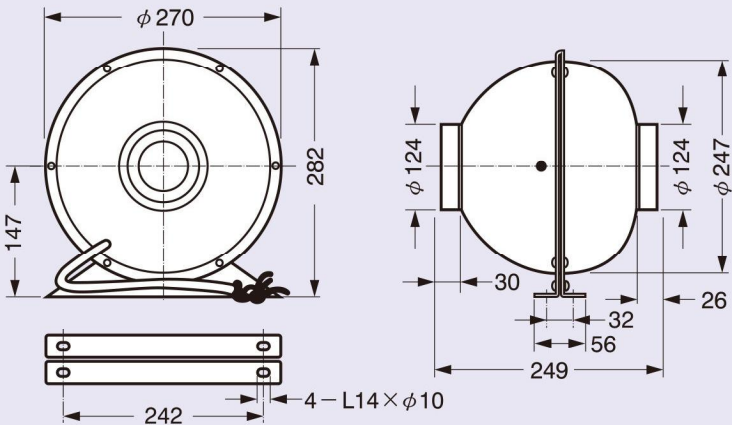


特性 型號	電 壓 VOLTAGE V	頻 率 FREQUENCY HZ	相 數 PHASE φ	極 數 POLES P	轉 速 SPEED RPM	入 力 INPUT POWER W	電 流 CURRENT A	風 量 AIR FLOW m³/min	靜 壓 STATIC PRESSURE mm Aq	噪 音 NOISE LEVEL dB (A)	重 量 WEIGHT Kg
UF-240	115	60	1	2	3100	195	2.00	6.1	56	66	3.3
	230	50	1	2	2760	145	0.75	5.3	38	63	3.3
		60			3100	200	1.00	6.1	56	66	
UF-250	115	60	1	2	2680	195	2.00	7.6	48	65	3.3
	230	50	1	2	2560	145	0.75	7.0	35	64	3.3
		60			2680	200	1.00	7.6	48	65	


UF-260

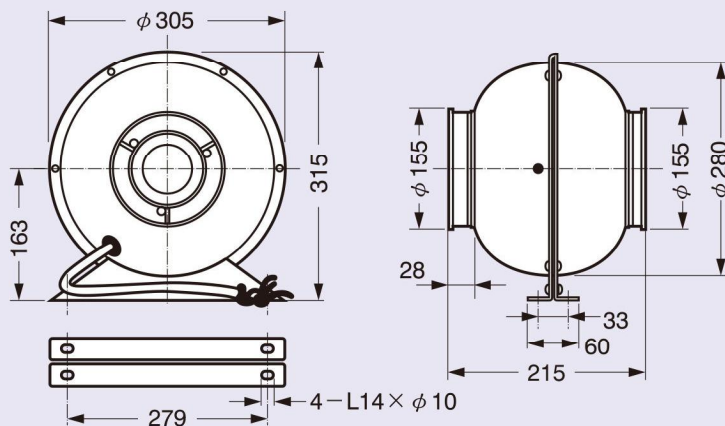


UF-260

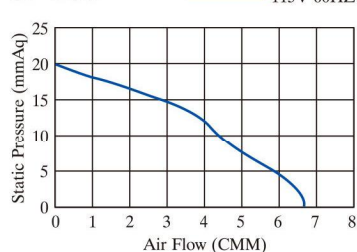


UF-260

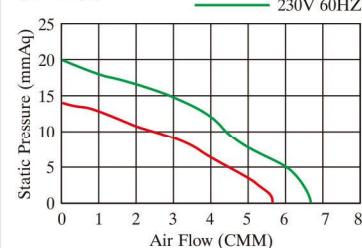


UF-280

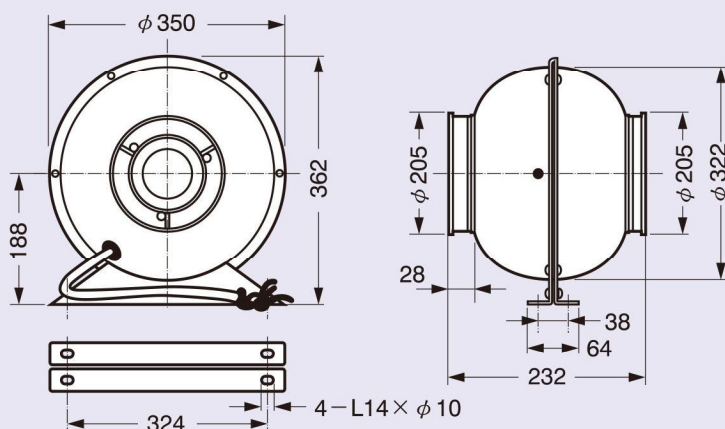

UF-280




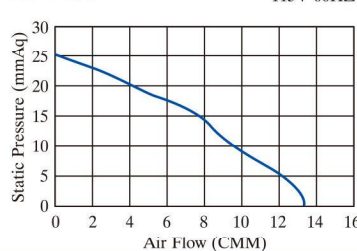


UF-280


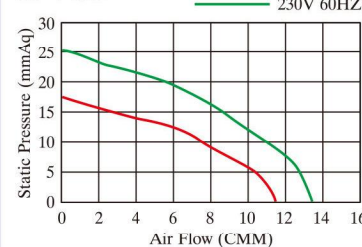


特性 型號	電 壓 VOLTAGE V	頻 率 FREQUENCY HZ	相 數 PHASE φ	極 數 POLES P	轉 速 SPEED RPM	入 力 INPUT POWER W	電 流 CURRENT A	風 量 AIR FLOW m³/min	靜 壓 STATIC PRESSURE mm Aq	噪 音 NOISE LEVEL dB (A)	重 量 WEIGHT Kg
UF-260	115	60	1	4	1630	80	0.90	6.7	20.0	59	3.8
	230	50	1	4	1400	75	0.50	5.7	14.0	56	3.8
		60			1630	85	0.45	6.7	20.0	59	
UF-280	115	60	1	4	1580	170	1.80	13.5	25.5	64	4.3
	230	50	1	4	1370	155	1.00	11.5	17.5	61	4.3
		60			1580	180	0.90	13.5	25.5	64	

UF-310

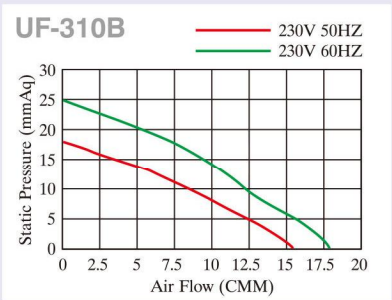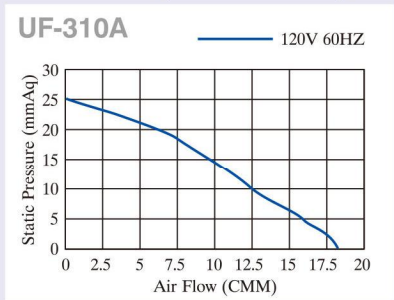
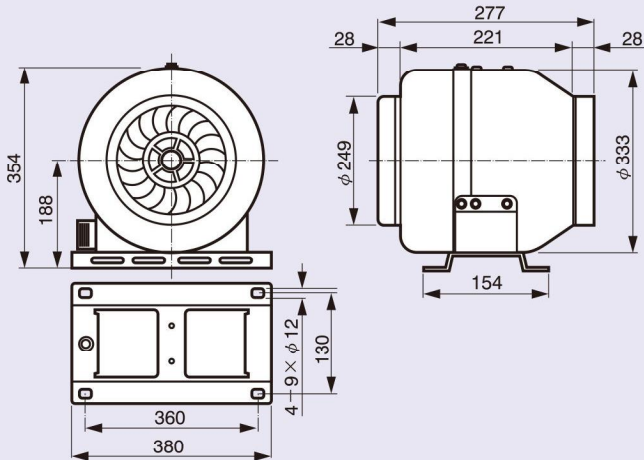
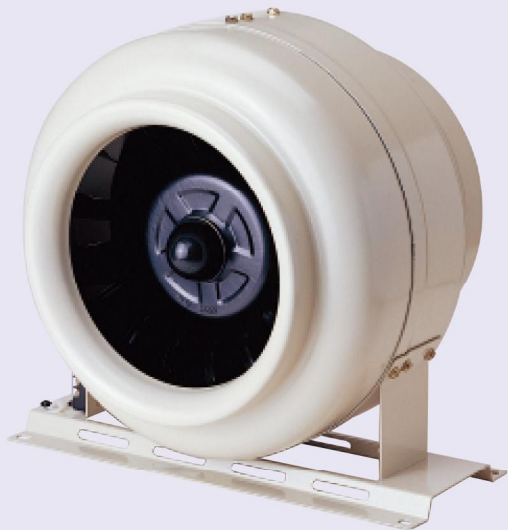


UF-310H


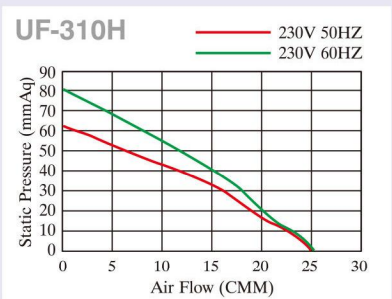
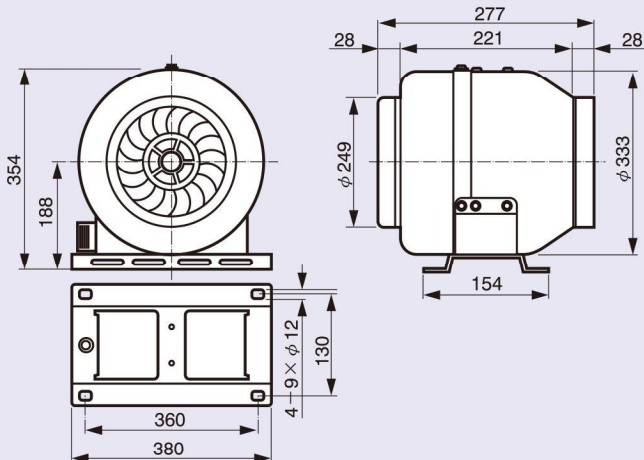


特性 型號	電 壓 VOLTAGE V	頻 率 FREQUENCY HZ	相 數 PHASE φ	極 數 POLES P	轉 速 SPEED RPM	入 力 INPUT POWER W	電 流 CURRENT A	風 量 AIR FLOW m³/min	靜 壓 STATIC PRESSURE mm Aq	噪 音 NOISE LEVEL dB (A)	重 量 WEIGHT Kg
UF-310	115	60	1	4	1640	170	1.7	18.3	25	61.0	8.4
	230	50	1	4	1400	125	0.7	15.5	18	57.0	8.4
		60			1630	165	0.8	18.0	25	60.0	
UF-310H	230	50	1	2	2050	385	2.0	25.0	62	67.4	12.8
		60			2060	470	2.6	25.3	80	67.6	

TX-240

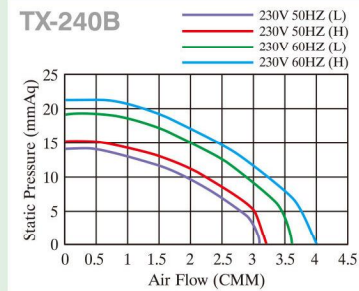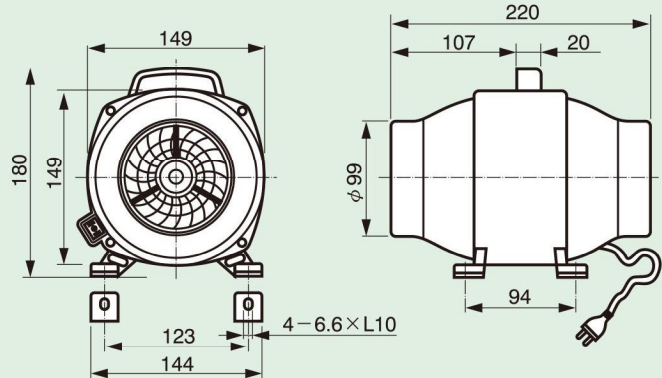

TX-260

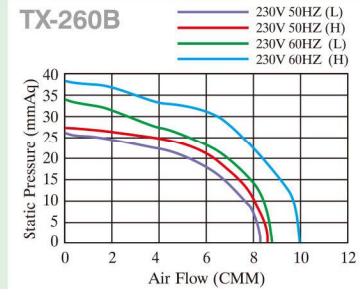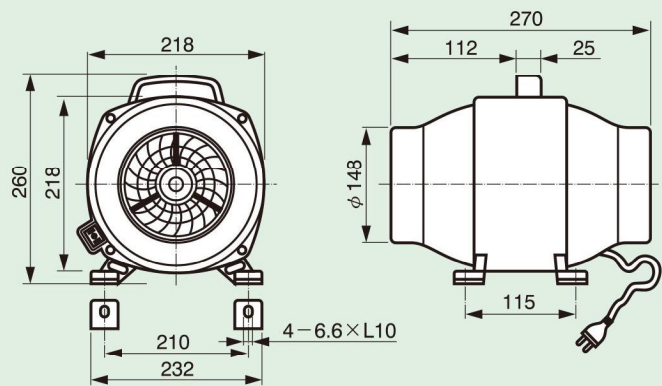

特性 型號	電 壓 VOLTAGE V	頻 率 FREQUENCY HZ	相 數 PHASE φ	極 數 POLES P	轉 速 SPEED RPM	入 力 INPUT POWER W	電 流 CURRENT A	風 量 AIR FLOW m³/min	靜 壓 STATIC PRESSURE mm Aq	噪 音 NOISE LEVEL dB (A)	重 量 WEIGHT Kg
TX-240A	115	60	1	2	2860 (L)	40	0.38	3.5	19	54.5	1.7
					3380 (H)	55	0.54	4.0	21	58.5	
TX-240B	230	50	1	2	2700 (L)	35	0.17	3.1	14	53.5	1.7
		60			3020 (L)	40	0.19	3.6	19	55.5	
	230	50	1	2	2880 (H)	52	0.32	3.2	15	54.5	1.7
		60			3380 (H)	55	0.27	4.0	21	58.5	
TX-260A	115	60	1	2	2780 (L)	155	1.50	8.7	33	65.5	3.7
					3340 (H)	163	1.60	10.0	38	69.0	
TX-260B	230	50	1	2	2750 (L)	105	0.52	8.3	26	65.2	3.7
		60			2950 (L)	155	0.75	8.8	34	66.2	
	230	50	1	2	2870 (H)	120	0.62	8.6	27	66.0	3.7
		60			3330 (H)	163	0.80	10.0	38	69.0	

X-240




* 噪音小、安裝容易。
Low Noise, Easy To Fixed.

* 通風、換氣、最佳利器。
The Most Efficiency Ventilation.




本公司擁有尺寸、性能變更設計權。

如有變動時，恕不另通知。

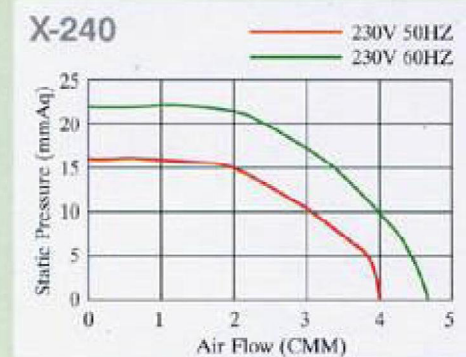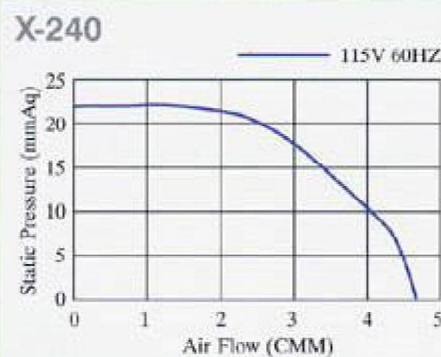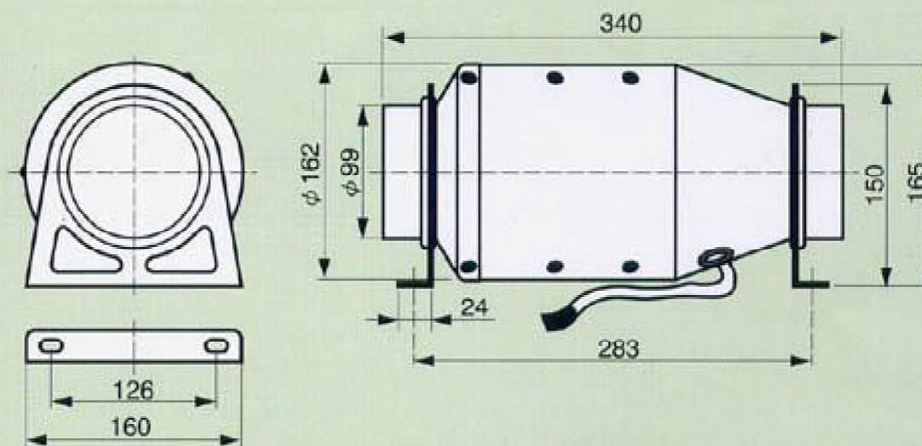


特性 型號	電 壓 VOLTAGE V	頻 率 FREQUENCY Hz	相 數 PHASE φ	極 數 POLES P	轉 速 SPEED RPM	入 力 INPUT POWER W	電 流 CURRENT A	風 量 AIR FLOW m³/min	靜 壓 STATIC PRESSURE mm Aq	噪 音 NOISE LEVEL dB (A)	重 量 WEIGHT Kg
X-240	115	60	1	2	3200	75	0.75	4.7	22	60.5	3.0
	230	50	1	2	2800	60	0.35	4.0	16	56.5	
		60			3200	80	0.40	4.7	22	60.5	

UF-306

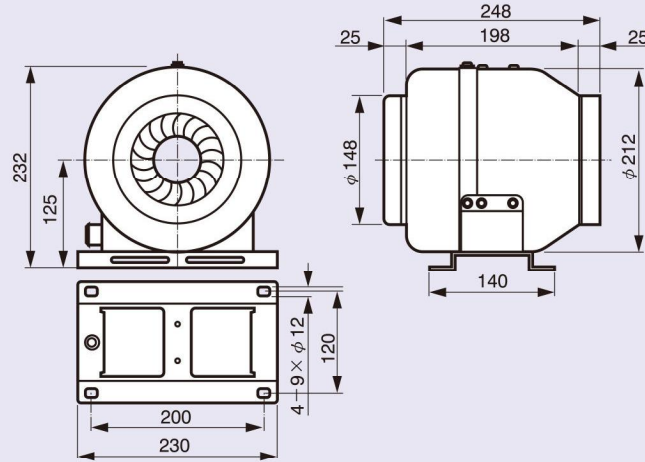

UF-306A

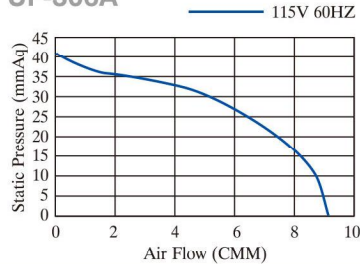

UF-306B

