

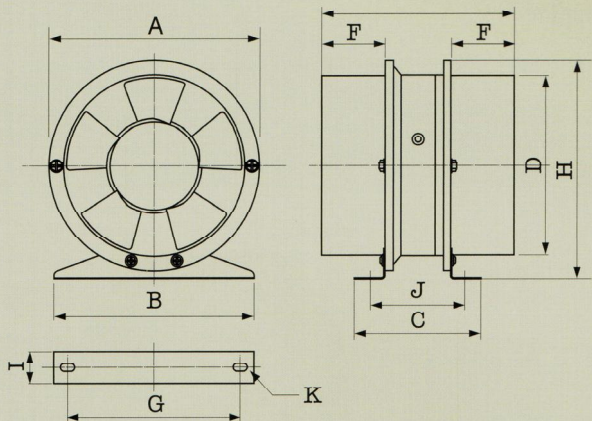
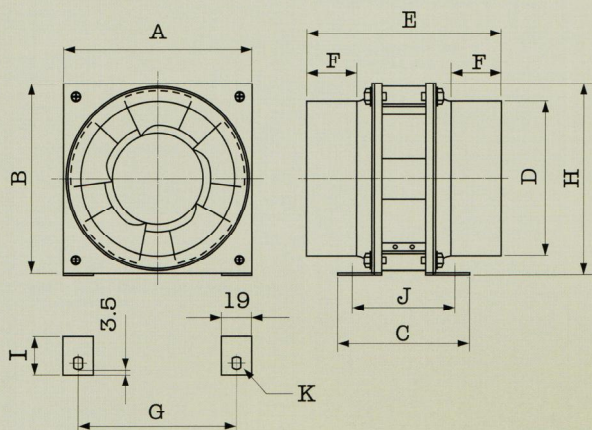
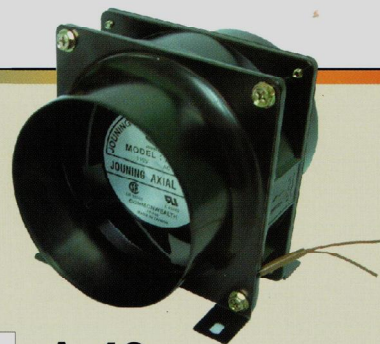



A-40/A-60/A-80



SIZE	A	B	C	ϕ D	E	F	G	H	I	J	K
A-40	120	121	85	98	125	32	100	120	24	72	$\phi 5.5 \times 8L$
A-60	174	165	103	147	157	52	142	180	26	78	$\phi 6.5 \times 12L$
A-80	226	200	121	199	164	50	180	235	30	92	$\phi 7 \times 11L$



A-40





A-60





A-80

型號 Model	規格 Spec.	電 壓 Voltage V	頻 率 Frequency Hz	相 數 Phase ϕ	極 數 Poles P	入 力 Input Power W	電 流 Current A	轉 速 Speed RPM	風 量 Max Air Flow CMM	靜 壓 Max Pressure mmAq	噪 音 Noise dB(A)	淨 重 Net Weight Kg
A-40		115	60	1	2	18	0.26	3030	3.0	7	51	0.86
			50	1	2	22	0.16	2630	2.4	6	49	
			60			18	0.13	3030	3.0	7	51	
A-60		115	60	1	2	35	0.50	3030	6.6	10.5	57	1.50
			50	1	2	38	0.28	2700	5.6	11.5	55	
			60			34	0.24	3030	6.6	10.5	57	
A-80		230	50	1	2	50	0.40	2420	12.4	8.5	57	2.25
			60			48	0.37	2150	11.4	4.5	53	



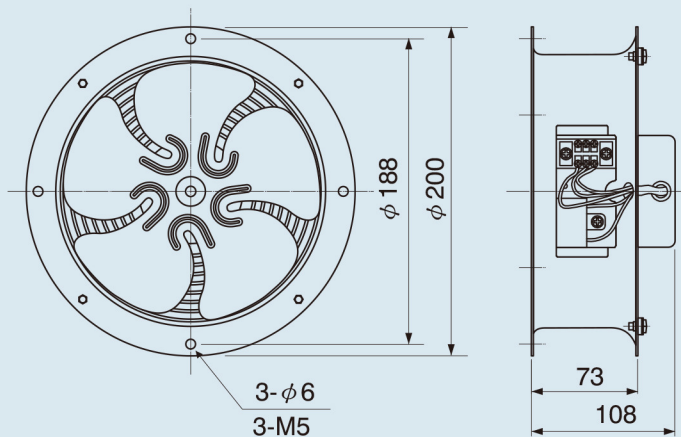


型號 Model	規格 Spec.	電 壓 Voltage V	頻 率 Frequency Hz	相 數 Phase φ	極 數 Poles P	入 力 Input Power W	電 流 Current A	轉 速 Speed RPM	風 量 Max Air Flow CMM	靜 壓 Max Pressure mmAq	噪 音 Noise dB(A)	淨 重 Net Weight Kg
JAF-M6		115	60	1	2	33	0.33	3050	8.3	13	65	1.2
		230	50	1	2	35	0.18	2650	7.3	12	61	1.2
			60			35	0.17	3050	8.3	13	65	

JAF-M8



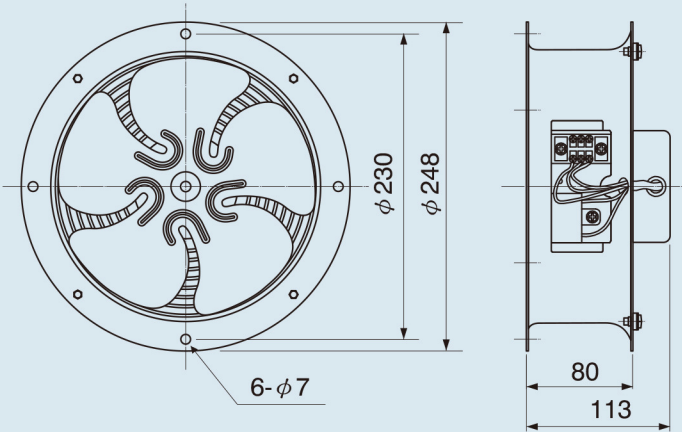


規格 Spec. Model	電 壓 Voltage V	頻 率 Frequency Hz	相 數 Phase φ	極 數 Poles P	入 力 Input Power W	電 流 Current A	轉 速 Speed RPM	風 量 Max Air Flow CMM	靜 壓 Max Pressure mmAq	噪 音 Noise dB(A)	淨 重 Net Weight Kg
JAF-M8	115	60	1	2	70	0.70	3200	17	17	69	1.9
	230	50	1	2	55	0.28	2800	15	21	66	1.9
		60			70	0.35	3200	17	17	69	


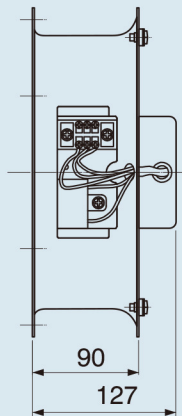
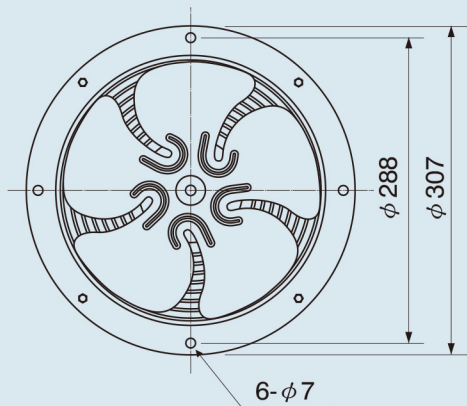


規格 Spec. 型號 Model	電 壓 Voltage V	頻 率 Frequency Hz	相 數 Phase φ	極 數 Poles P	入 力 Input Power W	電 流 Current A	轉 速 Speed RPM	風 量 Max Air Flow CMM	靜 壓 Max Pressure mmAq	噪 音 Noise dB(A)	淨 重 Net Weight Kg
JAF-M10	115	60	1	4	58	0.56	1670	18.7	14	59	3.2
	230	50	1	4	54	0.30	1420	15.5	11	55	3.2
		60			58	0.28	1670	18.7	14	59	

JAF-M10D


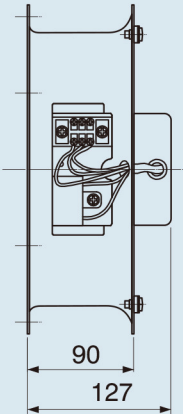
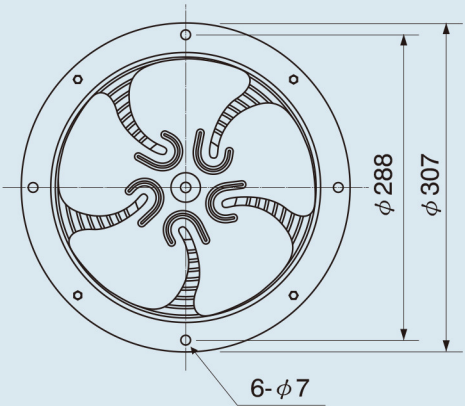


型號 Model	規格 Spec.	電 壓 Voltage V	頻 率 Frequency Hz	相 數 Phase φ	極 數 Poles P	入 力 Input Power W	電 流 Current A	轉 速 Speed RPM	風 量 Max Air Flow CMM	靜 壓 Max Pressure mmAq	噪 音 Noise dB(A)	淨 重 Net Weight Kg
JAF-M10D		220	50	3	4	33	0.20	1420	15.5	10.5	55.0	3.2
			60			37	0.17	1640	18.5	13.0	58.5	
		380	50	3	4	33	0.12	1420	15.5	10.5	55.0	3.2
			60			37	0.11	1640	18.5	13.0	58.5	

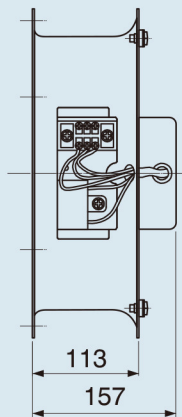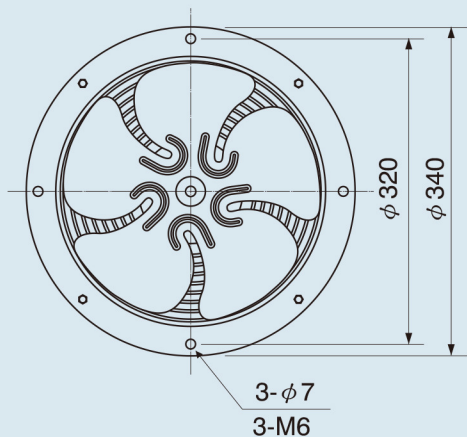



規格 Spec. 型號 Model	電 壓 Voltage V	頻 率 Frequency Hz	相 數 Phase φ	極 數 Poles P	入 力 Input Power W	電 流 Current A	轉 速 Speed RPM	風 量 Max Air Flow CMM	靜 壓 Max Pressure mmAq	噪 音 Noise dB(A)	淨 重 Net Weight Kg
JAF-M11	115	60	1	4	68	0.66	1570	26.5	14	63.5	6.8
	230	50	1	4	55	0.30	1380	23.2	12	60.0	6.8
		60			72	0.34	1560	26.5	14	63.4	

JAF-M12

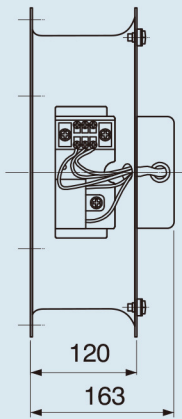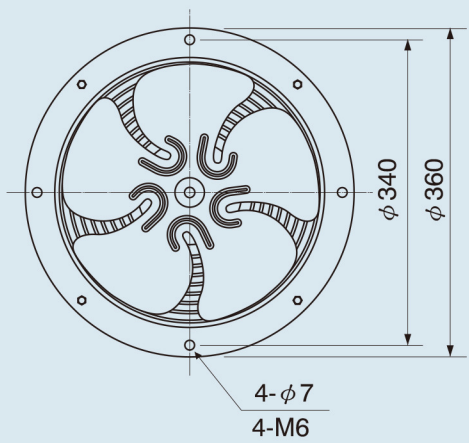




規格 Spec. Model	電 壓 Voltage V	頻 率 Frequency Hz	相 數 Phase φ	極 數 Poles P	入 力 Input Power W	電 流 Current A	轉 速 Speed RPM	風 量 Max Air Flow CMM	靜 壓 Max Pressure mmAq	噪 音 Noise dB(A)	淨 重 Net Weight Kg
JAF-M12	115	60	1	4	75	0.75	1560	31	13.0	63.8	7.2
	230	50	1	4	60	0.30	1380	27	13.5	60.2	7.2
		60			80	0.40	1560	31	13.0	63.8	

JAF-M12D

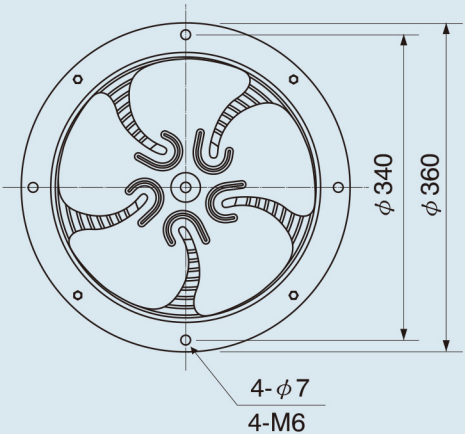




型號 Model	規格 Spec.	電 壓 Voltage V	頻 率 Frequency Hz	相 數 Phase ϕ	極 數 Poles P	入 力 Input Power W	電 流 Current A	轉 速 Speed RPM	風 量 Max Air Flow CMM	靜 壓 Max Pressure mmAq	噪 音 Noise dB(A)	淨 重 Net Weight Kg
JAF-M12D		220	50	3	4	60	0.30	1350	27	13	59.4	7.2
			60			75	0.30	1500	30	14	62.3	
		380	50	3	4	60	0.17	1350	27	13	59.4	7.2
			60			75	0.17	1500	30	14	62.3	

JAF-M14

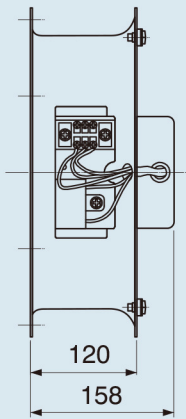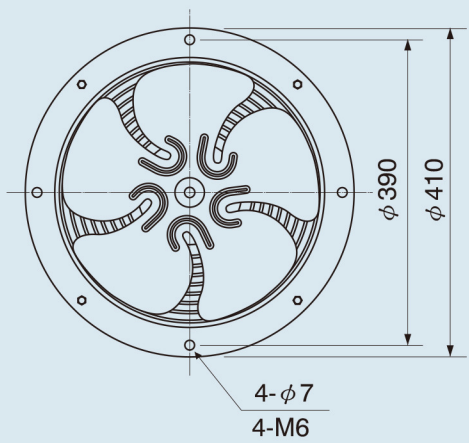



規格 Spec.	電 壓 Voltage V	頻 率 Frequency Hz	相 數 Phase φ	極 數 Poles P	入 力 Input Power W	電 流 Current A	轉 速 Speed RPM	風 量 Max Air Flow CMM	靜 壓 Max Pressure mmAq	噪 音 Noise dB(A)	淨 重 Net Weight Kg
型號 Model											
JAF-M14	115	60	1	4	120	1.2	1500	46	10.0	67.5	8.0
	230	50	1	4	90	0.5	1350	42	12.8	63.5	8.0
		60			125	0.6	1500	46	10.0	67.5	

JAF-M14D

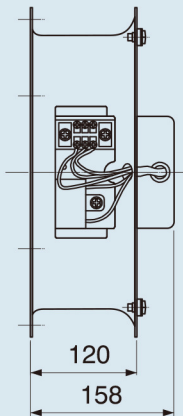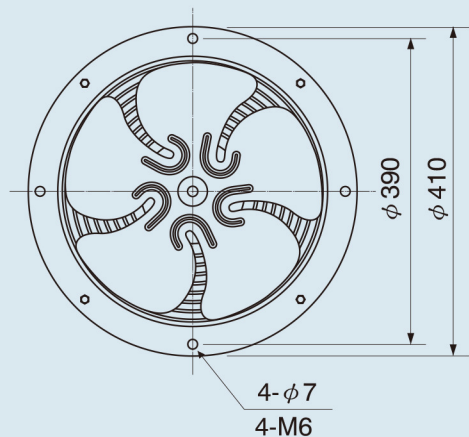




規格 Spec. 型號 Model	電 壓 Voltage V	頻 率 Frequency Hz	相 數 Phase φ	極 數 Poles P	入 力 Input Power W	電 流 Current A	轉 速 Speed RPM	風 量 Max Air Flow CMM	靜 壓 Max Pressure mmAq	噪 音 Noise dB(A)	淨 重 Net Weight Kg
JAF-M14D	220	50	3	4	85	0.40	1350	42	14	63.5	8.0
		60			120	0.42	1500	46	15	67.5	
	380	50	3	4	85	0.23	1350	42	14	63.5	8.0
		60			120	0.25	1500	46	15	67.5	

JAF-M16

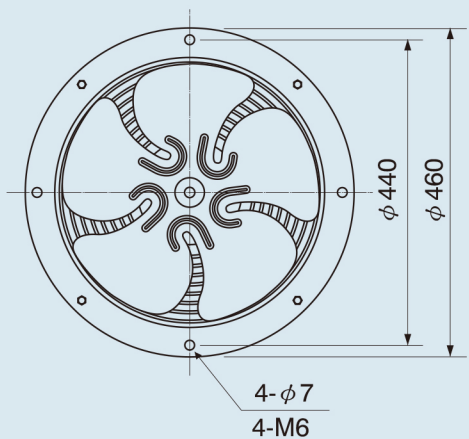

規格 Spec. Model	電 壓 Voltage V	頻 率 Frequency Hz	相 數 Phase ϕ	極 數 Poles P	入 力 Input Power W	電 流 Current A	轉 速 Speed RPM	風 量 Max Air Flow CMM	靜 壓 Max Pressure mmAq	噪 音 Noise dB(A)	淨 重 Net Weight Kg
JAF-M16	220	50	1	4	170	0.9	1350	52	23	65.7	9.0
		60			240	1.2	1540	56	26	68.2	9.0

JAF-M16D

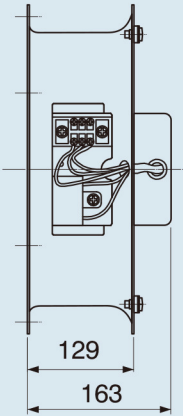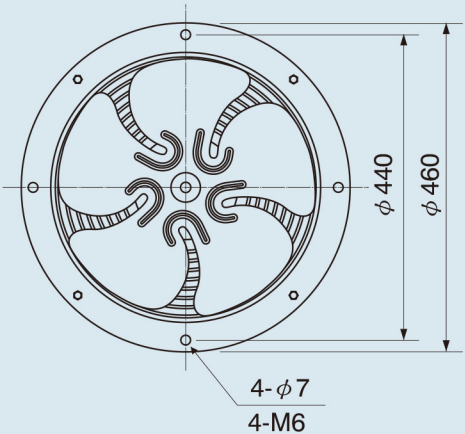

型號 Model	規格 Spec.	電 壓 Voltage V	頻 率 Frequency Hz	相 數 Phase φ	極 數 Poles P	入 力 Input Power W	電 流 Current A	轉 速 Speed RPM	風 量 Max Air Flow CMM	靜 壓 Max Pressure mmAq	噪 音 Noise dB(A)	淨 重 Net Weight Kg
JAF-M16D		220	50	3	4	160	0.75	1350	52	23	65.8	9.0
			60			220	0.82	1500	56	26	68.7	
		380	50	3	4	160	0.42	1350	52	23	65.8	9.0
			60			220	0.47	1500	56	26	68.7	

The technical drawing shows the TA-10 fan from three perspectives: front, side, and a 3D perspective view. The front view includes the following dimensions:


- Overall diameter: $\phi 288$
- Mounting hole diameter: $\phi 7.5 \times 16L$
- Outer diameter of mounting flange: 270
- Flange thickness: 40
- Inner diameter of mounting flange: 234
- Distance between mounting holes: 144
- Distance between mounting holes (inner): 234
- Distance between mounting holes (outer): 248
- Distance between mounting holes (center-to-center): 330
- Overall diameter including mounting flange: 355

The side view shows a total thickness of 88.



The 3D perspective view shows the fan's construction, including the motor housing, blades, and the protective grille.

The performance graph, titled "TA-10", plots Static Pressure [mmAq] on the Y-axis (0 to 6) against Air Flow [m³/min] on the X-axis (0 to 12). Two curves are shown: a blue curve for 50Hz and a red curve for 60Hz.

Air Flow [m³/min]	Static Pressure [mmAq] (50Hz)	Static Pressure [mmAq] (60Hz)
0	3.8	5.2
2	3.2	4.5
4	2.8	3.8
6	2.2	3.0
8	1.5	2.2
10	0.5	1.0





型號 Model	規格 Spec.	電 壓 Voltage V	頻 率 Frequency Hz	相 數 Phase φ	極 數 Poles P	入 力 Input Power W	電 流 Current A	轉 速 Speed RPM	風 量 Max Air Flow CMM	靜 壓 Max Pressure mmAq	噪 音 Noise dB(A)	淨 重 Net Weight Kg
TA-10		115	60	1	4	30	0.30	1630	10.3	5	59	1.8
		230	50	1	4	32	0.18	1380	8.5	4	56	1.8
			60			32	0.16	1630	10.3	5	59	


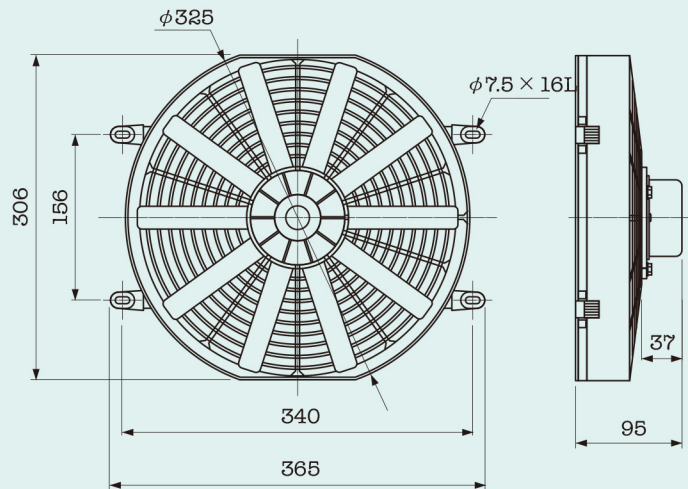


型號 Model	規格 Spec.	電 壓 Voltage V	頻 率 Frequency Hz	相 數 Phase φ	極 數 Poles P	入 力 Input Power W	電 流 Current A	轉 速 Speed RPM	風 量 Max Air Flow CMM	靜 壓 Max Pressure mmAq	噪 音 Noise dB(A)	淨 重 Net Weight Kg
TA-12		115	60	1	4	50	0.52	1630	14.2	5.5	61	2.0
		230	50	1	4	54	0.30	1380	12.0	4.2	57	2.0
			60			53	0.27	1630	14.2	5.5	61	

TA-12BG

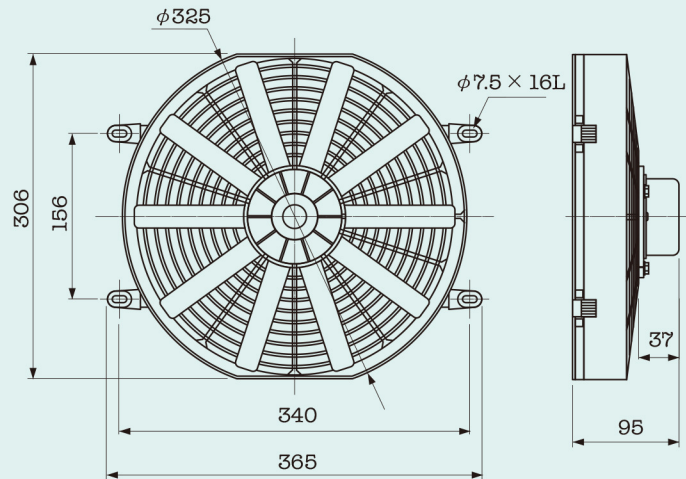

型號 Model	規格 Spec.	電 壓 Voltage V	頻 率 Frequency Hz	相 數 Phase ϕ	極 數 Poles P	入 力 Input Power W	電 流 Current A	轉 速 Speed RPM	風 量 Max Air Flow CMM	靜 壓 Max Pressure mmAq	噪 音 Noise dB(A)	淨 重 Net Weight Kg
TA-12BG		230	50	1	4	30	0.15	1350	11.5	3.7	56.5	2.0
			60			35	0.17	1550	13.5	5.0	60.5	2.0

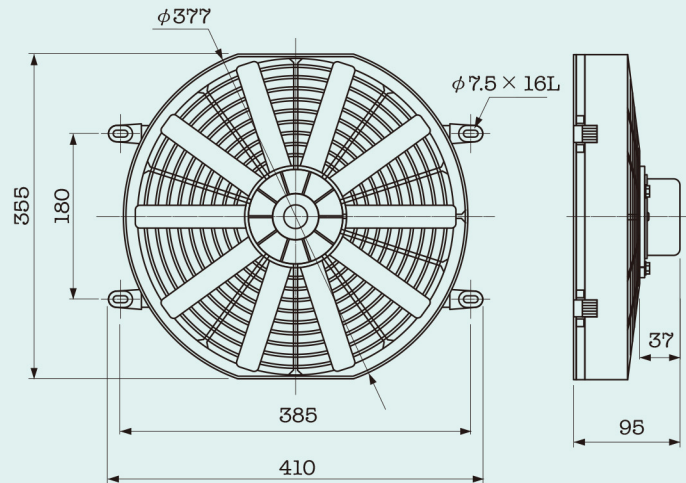

型號 Model	規格 Spec.	電 壓 Voltage V	頻 率 Frequency Hz	相 數 Phase φ	極 數 Poles P	入 力 Input Power W	電 流 Current A	轉 速 Speed RPM	風 量 Max Air Flow CMM	靜 壓 Max Pressure mmAq	噪 音 Noise dB(A)	淨 重 Net Weight Kg
TA-14		115	60	1	4	52	0.52	1580	24	6.2	66	2.3
		230	50	1	4	45	0.25	1380	21	4.6	63	2.3
			60			55	0.28	1580	24	6.2	66	